


B-15
MV2255dB

MOMEC
Doors of Sweden

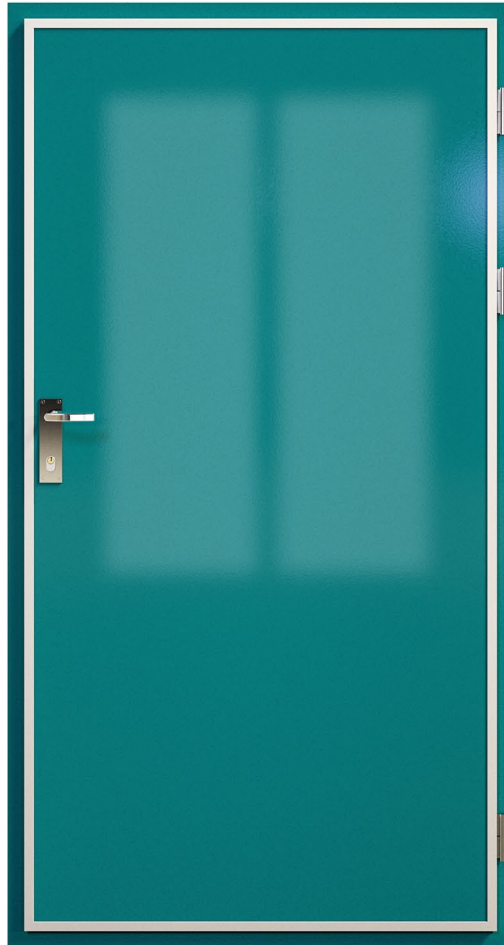

CHARACTERISTICS

B15 HIGH SOUNDREDUCTION (44dB LAB VALUE)

DOORLEAF (53 MM): 1,5 mm galvanized steel with core of mineralwool (170kgs/m³)

OPTION DOORLEAF FINISH: Stainless steel, laminated, painted or pvc coated.

FRAME: 1,5 mm galvanized steel

OPTION FRAME FINISH: Stainless steel or powder epoxy coated (painted)

HINGES: Three pcs of stainless steel

STRIKERPLATE: Stainless steel (1,0 mm)

SILL COVERPLATE: Stainless steel (1,0 mm)

LOCKING: Assa Abloy, Schwepper, VingCard, Dorma.

MAX. CERTIFIED CLEAR OPENING: 1095 x 2077 mm (W x H)

OPTION: Window and kick-out panel

Reinforcement for holder and closer at upper and lower part of doorleaf.

Momec AB

Stråkenvägen 2 • SE-565 76 Bottnaryd • Phone +46 36 203 00
www.momec.com • info@momec.com